

EXP-108

EXP-SERIES
POWER PRE-STRETCH



EXP-108W


EXP-SERIES
POWER PRE-STRETCH
WITH WEIGHING SYSTEM



MAJOR FEATURES

- 300% POWER PRE-STRETCH. 1 METER FILM PRE-STRETCHED TO BE 4 METERS.
- TURNTABLE HOME POSITION.
- SOFT START AND STOP.
- CHOICES OF AUTOMATIC/ MANUAL MODES
- ADJUSTABLE TOP AND BOTTOM WRAP COUNTS.
- ADJUSTABLE WRAPPING TENSION/ TURNTABLE SPEED/ CARRIAGE SPEED.
- 180° ROTATING CONTROL BOX.
- TROUBLE SHOOTING SHOWN ON SCREEN.
- MANUAL REINFORCING WRAPPING.
- SAFETY SWITCH TO PREVENT FROM FOOT PITCH.
- HEIGHT DETECTION BY PHOTO SENSOR.
- ADVANCED SOFT WRAPPING.
- AUTOMATIC FILM PIN PUNCTURE.
- ONE WAY IDLE ROLLER.

DESIGNED TO ALLOW FILM TAIL TO STAY OUTSIDE OF CARRIAGE WHEN BREAK.

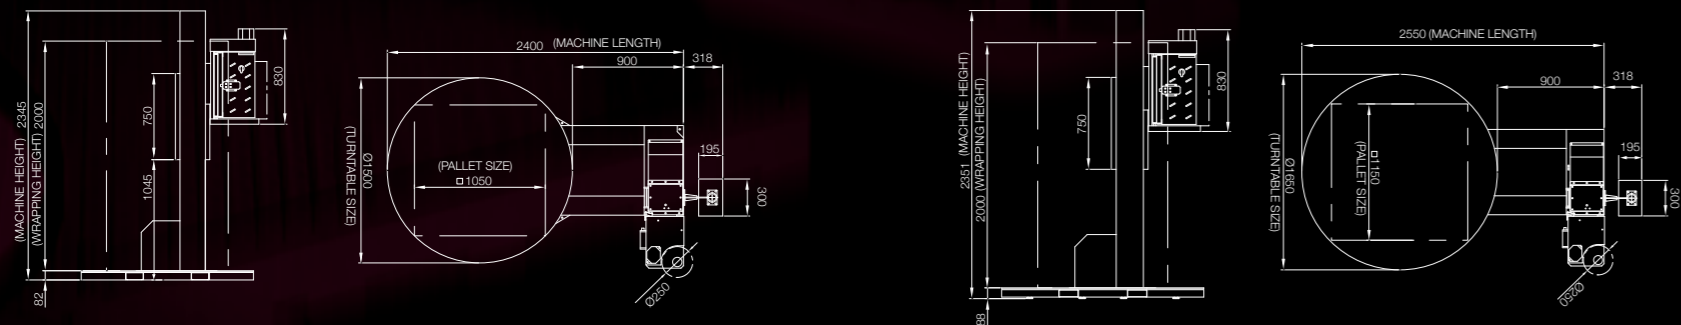

OPTIONS

- Turntable Dia.: 1.65M (Max. Loading Weight: 1650kg), 1.8M (Max. Loading Weight: 2000kg).
- Wrapping Height: 2.5M, 3.0M.
- Ramps: for 1.5M, 1.65M, 1.8M
- Turntable Type: Horse Shoe 1.65M (Max. Loading Weight 1200kg)
- Top Pressure Plate



STANDARD SPECIFICATION

- Max. Wrapping Height: 2 M
- Max. Turntable Speed: 12 rpm
- Max. Loading Weight: 1650 kg
- Turntable Diameter: 1500mm
- Power Supply: 100V/110V/220V/230V/240V., 50/60HZ., 1-Phase.
- Power Consumption: 1.2 kw
- Turntable Motor: 220V., AC., 3-Phase
- Carriage Motor: 220V., AC., 3-Phase
- Power Pre-Stretch Motor: 220V., AC., 3-Phase



□ weight scale display



□ open type carriage for easy film threading.

□ LOAD CELL

