



Threading Path for Blown Film

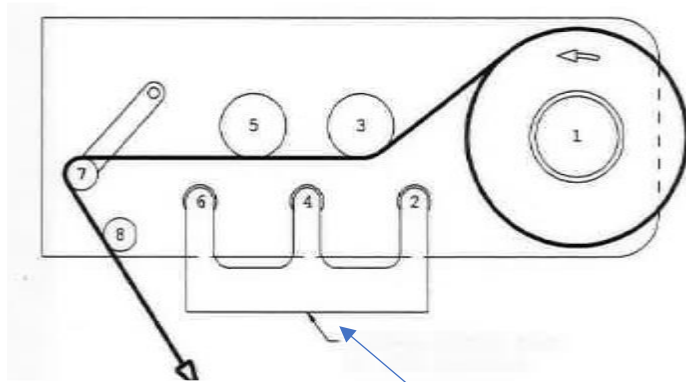

Attach the film to
the pallet

Guiding Roller Door
in open position

Threading Path for Cast Film

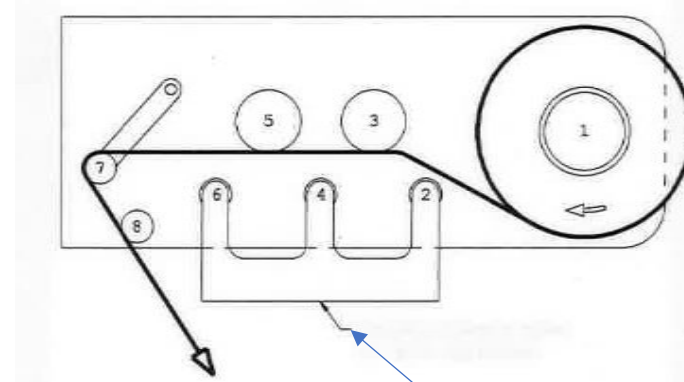

Attach the film to
the pallet

Guiding Roller Door
in open position

1 – Film Roll 2, 4, 6 = Door Guiding Roller 3 = Brake Roller 5 = stretching Roller
7 = Dancer Arm Roller 8 = Guiding roller

Place the film roll on the roll holder with its end to suit the film type. Pull out approximately one meter of film from the roll and pass it between the door guiding rollers and the brake & stretch rollers and then around the dancer arm roller.

Close the door and pull the film smoothly out of the film head towards the load and attach the film end to the pallet.