


Technical data

90g/m² - 2 sides coated

GRIP
SHEET®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m ²	NF EN ISO 536, 1996	123	
■ Thickness	µm	NF EN ISO 534, 2005	229	216 - 241
BREAKING STRENGTH IN TENSION				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	5,88
			ST	1,94
■ Rupture length	meters		SM	4955
			ST	1635
■ Elongation	%		SM	1,6
			ST	2,2
■ Burst Index	kPa	NF EN ISO 2758, 2004	190	
■ Friction coefficient	°	NF Q 03-083,1993	SM	52,6
■ air porosity	cm ³ /m ² .Pas	NF ISO 5636.3, 1992		6,6
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

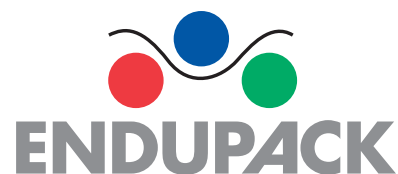

**ENDUPACK**

- Pallet quantity = 5,000 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold